


Tasseaux droit à serrage arrière
Straight cleats with back clamping
Aufspanndorne mit ruckseitige Klemmung

695

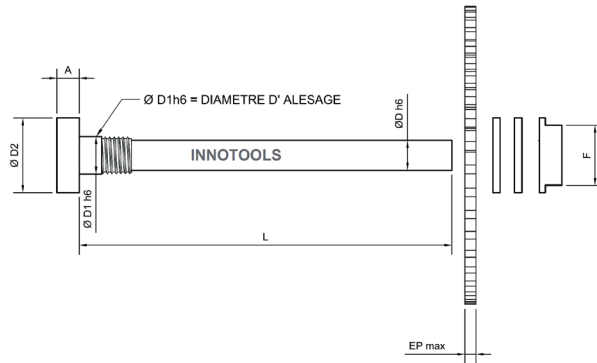

En acier rapide
Jusqu'à 6 mm
d'épaisseur
High-speed steel
Up to 6 mm
In HSS
Dicke bis 6 mm

Gauche
left
Links

695

REF	ØD1	ØD2	ØD	L	A	F	ep max
695-G-5-4	5	10	4	50	3	8	6
695-G-6-5	6	12	5	60	3	10	6
695-G-8-6	8	15	6	70	3	13	6
695-G-10-6	10	18	6	70	3.5	15	6

Droite
right
recht

695

REF	ØD1	ØD2	ØD	L	A	F	ep max
695-D-5-4	5	10	4	50	3	8	6
695-D-6-5	6	12	5	60	3	10	6
695-D-8-6	8	15	6	70	3	13	6
695-D-8-7	8	15	7	80	3	13	6
695-D-10-6	10	18	6	70	3.5	15	6
695-D-10-8	10	18	8	90	3.5	15	6
695-D-13-10	13	22	10	110	3.5	19	6
695-D-16-12	16	26	12	120	3.5	22	6