


Corps Ø 6
 Shank Ø 6
 Schaft Ø 6

Hélice à 45°
 Helix angle 45°
 Spiralwinkel 45°

l1 = 2 x Ø

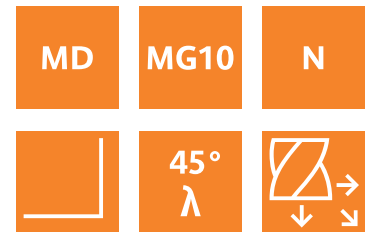

| Ød1e8 | l1 | ØDh6 | L | Rev. TiALN |
|-------|------|------|----|------------|
| 0.50 | 1.00 | 6 | 39 | ☑ |
| 0.60 | 1.20 | 6 | 39 | ☑ |
| 0.70 | 1.40 | 6 | 39 | ☑ |
| 0.80 | 1.60 | 6 | 39 | ☑ |
| 0.90 | 1.80 | 6 | 39 | ☑ |
| 1.00 | 2.00 | 6 | 39 | ☑ |
| 1.10 | 2.20 | 6 | 39 | ☑ |
| 1.20 | 2.40 | 6 | 39 | ☑ |
| 1.30 | 2.60 | 6 | 39 | ☑ |
| 1.40 | 2.80 | 6 | 39 | ☑ |
| 1.50 | 3.00 | 6 | 39 | ☑ |
| 1.60 | 3.20 | 6 | 39 | ☑ |
| 1.70 | 3.40 | 6 | 39 | ☑ |
| 1.80 | 3.60 | 6 | 39 | ☑ |
| 1.90 | 3.80 | 6 | 39 | ☑ |
| 2.00 | 4.00 | 6 | 39 | ☑ |

| Ød1e8 | l1 | ØDh6 | L | Rev. TiALN |
|-------|------|------|----|------------|
| 2.10 | 4.20 | 6 | 39 | ☑ |
| 2.20 | 4.40 | 6 | 39 | ☑ |
| 2.30 | 4.60 | 6 | 39 | ☑ |
| 2.40 | 4.80 | 6 | 39 | ☑ |
| 2.50 | 5.00 | 6 | 39 | ☑ |
| 2.60 | 5.20 | 6 | 39 | ☑ |
| 2.70 | 5.40 | 6 | 39 | ☑ |
| 2.80 | 5.60 | 6 | 39 | ☑ |
| 2.90 | 5.80 | 6 | 39 | ☑ |
| 3.00 | 6.00 | 6 | 39 | ☑ |
| 3.50 | 7.00 | 6 | 39 | ☑ |
| 4.00 | 8.00 | 6 | 39 | ☑ |
| 4.50 | 9.00 | 6 | 39 | ☑ |
| 5.00 | 10.0 | 6 | 39 | ☑ |
| 6.00 | 12.0 | 6 | 39 | ☑ |

